FIGGERS
WIRELESS

ENC

F-Buds Pro

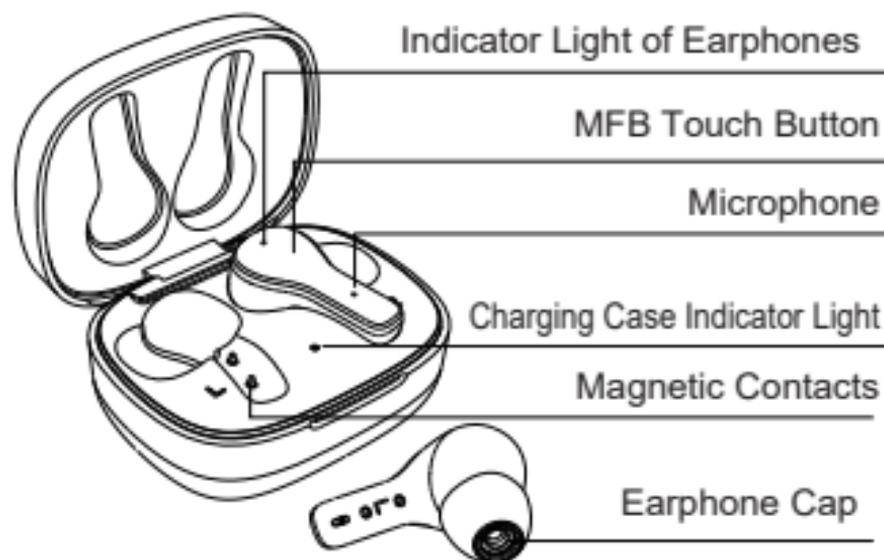## User Manual

Bluetooth

Touch Control

50+ HOURS
Long Life Battery

Water Resistent

Product overview

Indicator Light of Earphones

MFB Touch Button

Microphone

Charging Case Indicator Light

Magnetic Contacts

Earphone Cap

Ear caps

We provide three sizes of ear caps (large, medium and small). Please use the proper size of ear caps to fit your ears to get a better wearing experience.

Left   Right

L

M

S

Earphone operation

1.Take out the two earbuds from the charging case and peel off the insulating film.

2. Put the two earphones back into the charging chamber and cover. (The earphones will be charging)

3. Open the cover of the charging chamber, and the earphones will automatically turn on and interconnect. Will be in the waiting mode to be paired. (the white light flashes)

4.After successful paired the indicator of the right earbud will go off and the indicator of left earbud White indicator light flashes.

5.Turn on the Bluetooth function on your phone and search 【F-Buds Pro】and connect it.

Siri and other Voice Assistant

iOS and the Android users can triple touch the left or right haptic button to turn on the voice assistant.

Turn ON

Open the charging chamber and it will turn on automatically; or touch the button for 3 seconds to turn it on. (The white light will be on for 1 second)

Turn OFF

Put the earphones into the charging chamber and cover. It will turn off automatically. Or it will turn off automatically after 5 minutes of disconnection of Bluetooth.

LED indicator

Charging for case

Status	Light
Charging case charging	Orange indicator light flashes
Full battery	No light
Charging for earbuds	Blue indicator light flashes
Low Battery	Blue indicator light flashes

Earbuds indicator

Status	Light
Turn on	The white light flashes slowly after it is on for one second
Turn off	The earphone will turn off after the white light flashes for 1 second
The earphones searching for each other	The white lights of both earphones flash slowly
The earphones pairing successfully	The light of the main earphone flashes, The light of the vice earphone goes out
The earphone is connected to the phone successfully(Standby)	The white lights of both earphones flash once circularly in 6 seconds.
Music play	No light
Low battery	The white light flashes once per 3 seconds
Charging	White light on
Full battery	White light off

Restore factory setting

1. Restore factory setting when the earbuds can't turn or show no response.
2. Hold the power button for 10 seconds.

Charge

Note: Please put both earbuds in the charging case to fully charge them on first use.

Charging earbuds

White indicators flash when battery is low, please charge in time.
1. Put both earbuds into the charging case, they will charge automatically.
2. Charging will stop when earbuds are fully charged.

Charging Case

Orange indicator light flashes when battery is low, please charge in time.
1. Plug the TYPE-C cable into the charging interface and the charging case will charge automatically . (When it is greater than 5V 1A, the charging case will adapt to the charger's current limit automatically)
2. If you do not use the charging case for a long time, please charge it to a fully charged state at least every 3 months.

Button control

Power on	Open the charging chamber and it will turn on automatically
Power off	Put the earphones into the charging chamber and cover. It will turn off automatically.
Previous track	double tap left earbud MFB Button
Next track	double tap right earbud MFB Button
Volume -	Hold and press left earbud MFB Button
Volume +	Hold and press right earbud MFB Button
Play / Pause	single tap any MFB Button
Answer the call	single tap any MFB Button Enable ENC function at the same time
Hang up	hold and press any MFB Button for about 2s
Reject call	hold and press any MFB Button for about 2s
Voice activated assistant	tap any MFB Button 3 times

Note
In the left mono-earbud mode, the next song and volume + functions are not supported.
In the right mono-earbud mode, the previous song and volume- functions are not supported.

Specifications

Version	V5.0
Support	A2DP, AVRCP, HFP, HSP
Transmission distance	10m
Frequency range	2.402GHz~2.480GHz
Speaker	Φ 6mm*2
Impedance	16Ω
Standby time	50 hours
Talk time	4 hours
Playing time	4 hours
Earphone battery capacity	40mAh
Fully charged time	1 hour
Charging case battery capacity	300mAh
Charging time of charging case	About 1 hour
Weight (single earbud)	4.5 g

Wireless Charging

Designed for the modern life, never be strangled by charging cables.

Enjoy the convenience of wireless charging and free charging devices provided by airports, hotels, and cafe shops around the world.

(*FIGGERS Wireless Super Charger Not Included*)

Waterproof

Waterproof for daily life, you cannot submerge earbuds into water. Ideal for sweating it out at the gym, or you can wear these earbuds while washing face, showering, running in the rain. Please do not use them while you are diving or swimming.
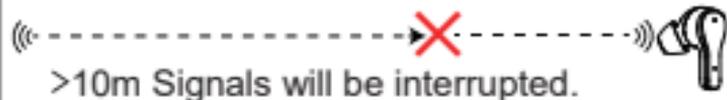
rain or water
having a bath

swimming or diving

Signal transmission distance shown as below:

≤10m Signals is in normal transmission.

>10m Signals will be interrupted.

Attentions

1. Please do not use this product while diving as water will block signal.
2. Do not use corrosive liquid to clean this product.
3. If this product is accidentally exposed to chemicals, clean it with water
4. Do not use this product under extreme circumstances for temperature below -10 degree Celsius or above 60 degree Celsius .
5. To avoid explosion, please do not throw this product into fire.
6. To avoid scratches, please do not touch the earbuds with sharp objects.
7. Do not insert objects into the earbuds, otherwise it would cause damage to the internal components.
8. Do not disassemble the earbud.
9. Please keep regular charge to earbuds, don't leave them become empty battery status to keep their lifetime.
10. Please do not charge products with power adapter over 2A current. Excessive current may cause the damage to battery.

Battery Warning !

There is a built-in lithium battery in this product. To avoid explosion, do NOT expose the product to strong sunlight, fire or throw it into fire.